


# How to Set Aweber's Parser

Aweber needs a password setting up before it can work with FusionHQ. Here's how...

**Step 1:** Go to Aweber: My lists > Email Parser



**Step 2:** Click "add new" next to "Custom Parsers".

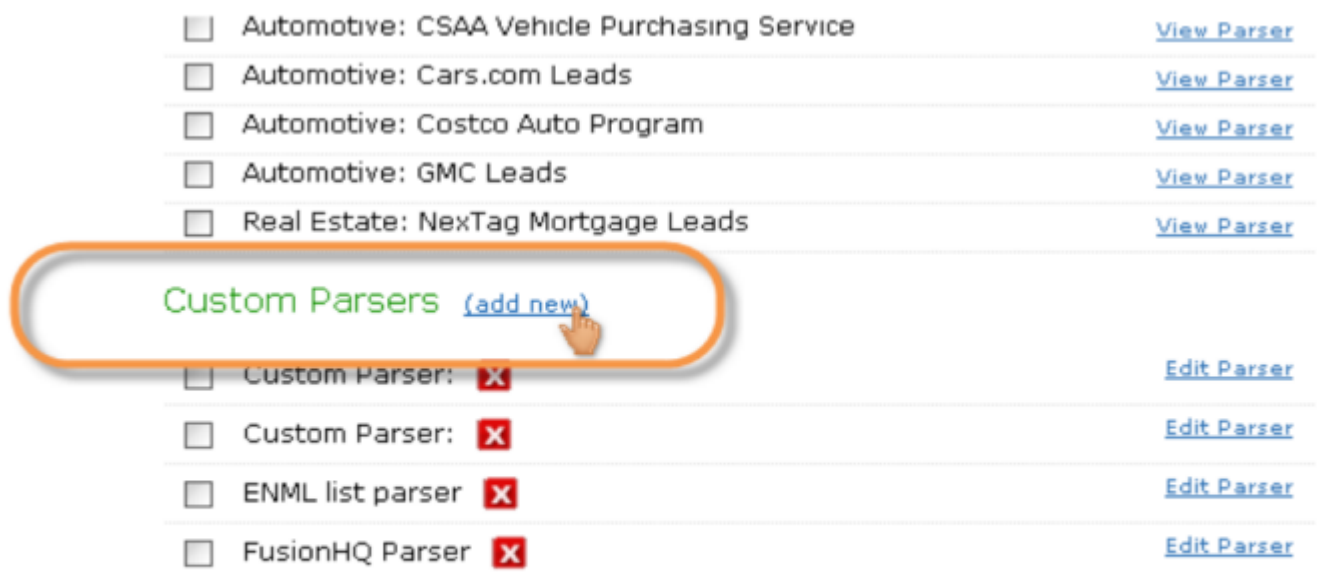

## Test Active Parsers:

Paste the full text of an email below, including full headers.

**Step 3:** Change "Trigger Rule" to "From:[^\n]+aweber\@fusionhq\.com". And then save.

**Instructions:**  
Define a trigger regex. If an email matches the trigger regex, then the rest of the regexes are applied to the email. All regexes use perl syntax.



Description: Custom Parser

Trigger Rule: From:[^\n]+aweber\@fusionhq\.com Match On: Headers

Decode HTML Entities?  Yes  No

Rule 1: \n[>|<|&quot;]\*Email:(\w+|\w+\.\w+)?\n Match: Body Store In: Email

Rule 2: \n[>|<|&quot;]\*Name:(\w+|\w+\.\w+)?\n Match: Body Store In: Name

Rule 3: Match: Body Store In: Email

Rule 4: Match: Body Store In: Email

Save



Description: Parser fusionHQ:

Trigger Rule: From:[^\n]+aweber\@fusionhq\.com Match On: Headers

Decode HTML Entities?  Yes  No

**Step 4:** Select the list on the top left. Make sure you choose the same list which you have entered inside FusionHQ.




AWeber COMMUNICATIONS

Home My Lists Messages

Current List: fhq\_aweber1 (Create and Manage Lists)

Third Party Integration Integrate your list with many shopping carts and other third-p

**Step 5:** Enable the parser. You are done.

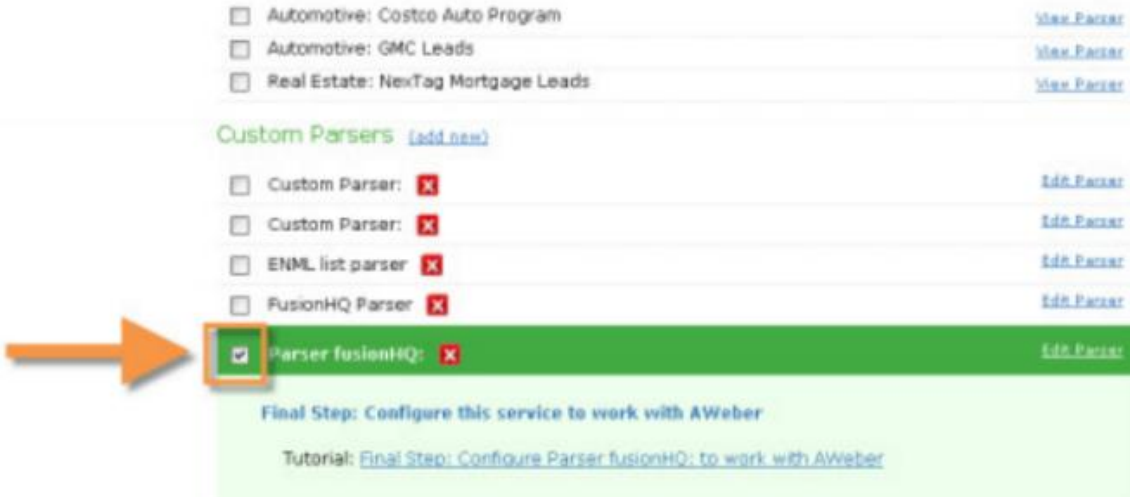

Automotive: Costco Auto Program [View Parser](#)

Automotive: GMC Leads [View Parser](#)

Real Estate: NexTag Mortgage Leads [View Parser](#)

Custom Parsers [\(add new\)](#)

Custom Parser: [x](#) [Edit Parser](#)

Custom Parser: [x](#) [Edit Parser](#)

ENML list parser [x](#) [Edit Parser](#)

FusionHQ Parser [x](#) [Edit Parser](#)

Parser fusionHQ: [x](#) [Edit Parser](#)

Final Step: Configure this service to work with AWeber

Tutorial: [Final Step: Configure Parser fusionHQ: to work with AWeber](#)